

iPad Vesa

Assembly Instructions



Inserting iPad into enclosure

1



Carefully remove iPad components from carton.

2



Insert key provided into lock, rotate clockwise through 90° to unlock, and remove lock from enclosure.

3



Slide and remove upper enclosure cover.

4



If using the iPad 2 or iPad 3 please insert the iPad into the silicon protective sleeve provided, to minimise movement within the enclosure.



Carefully place iPad into enclosure back section, ensuring that the home button is adjacent to the lock aperture.


5



Slide cover back into position and secure with lock.

iPad Vesa Display

1




Ensure bracket clamp and Vesa mount are assembled to the iPad enclosure.

2



Locate bracket clamp grooves into channel of 8-way post.

3

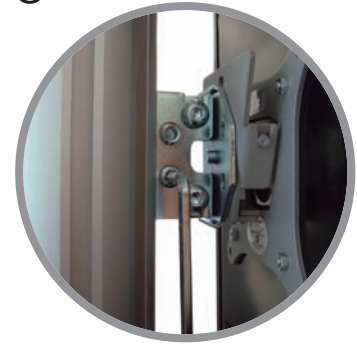

Adjust and tighten 4 screws at side of interface bracket until securely clamped to post in desired position.